



## CUSTOMER INFORMATION

### Nitrile N15

#### Description:

Our Nitrile N15 Gloves are an excellent allergy-free alternative to household latex gloves. Available in a range of colours, these distinctive gloves offer great wet and dry grip – ideal if you perform industrial cleaning tasks.

- Cat III Complex Design
- Conforms to EN 388 levels 3-1-0-1
- Conforms to EN 374 parts 1-3
- Enhanced chemical protection
- 15 mil NBR
- 33cm length
- Textured grip palm

#### Fabric:

- Nitrile
- Flock lined

#### Applications:

Tasks with industrial cleaning, general wet handling tasks, chemical handling, food processing, food handling

#### Colourways:



#### Product Codes:

12311-5	S - 2XL	Blue
12331-5	S - 2XL	Green

#### Standards:



EC Council Directive 89/686/EEC  
Plastic Materials and Articles in Contact with Food Regulation (EU) No 10/2011  
BS EN 420:2003+A1:2009 - Sizing & Dexterity: PASS

EN 388




Abrasion: 3  
Blade Cut: 1  
Tear: 0  
Puncture: 1

EN 374



Methanol: 2  
n-Heptane: 6  
Sodium Hydroxide 40%: 6  
Sulphuric Acid 96%: 3

BS EN 388:2003 - Protection Against Mechanical Hazards  
BS EN 374:2003 Parts 1-3 - Chemical use



#### Size Chart:


Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279

Issue No.: 2

Issue Date: 01/09/2014

**Packaging:** 1 pair per bag - 12 pairs per master poly - 12 bags per case

**Outer Carton Artwork:**

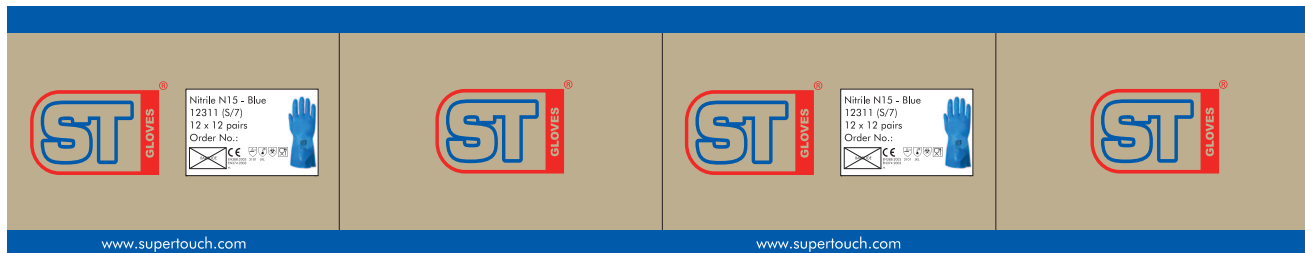

**Inner Artwork:**

X

N15 Nitrile Gloves

Size S/7

3101 JKL

N15 Nitrile Gloves  
Product code: 12311  
Colour: Blue  
Size: SMALL/7

Supertouch®, Unit A1 Hubert Road, Brentwood, Essex, CM14 4JE  
Notified Body: SATRA Technology Centre, Kettering, Northamptonshire, UK, NN16 8SD

X

**EN 420 - Sizing & Dexterity** PASS

**EN 388 - Mechanical Hazards** 3-1-0-1

Test	Abrasion	Cut	Tear	Puncture
Level	3	1	0	1

**EN 374-2 Air & Water Leak Tests**

Air Leak Test PASS  
Water Leak Test PASS

**EN 374-3 Permeation Performance Levels**  
Measured breakthrough time in minutes

Time	10	>30	>60	>120	>240	>480
Level	1	2	3	4	5	6

	Chemical	Chemical Class	EN 374-3 Level
A	Methanol	Primary Alcohol	2
B	Acetone	Ketone	
C	Acetonitrile	Nitrile Compound	
D	Dichloromethane	Chlorinated Paraffin	
E	Carbon Disulphide	Sulphur Containing Organic Compound	
F	Toluene	Aromatic Hydro Carbon	
G	Diethylamine	Amine	
H	Tetrahydrofuran	Heterocyclic and Ether Compound	
I	Ethyl Acetate	Ester	
J	n-Heptane	Hydrocarbon	6
K	Sodium Hydroxide (40%)	Inorganic Base	6
L	Sulphuric Acid (96%)	Inorganic Mineral Acid	3
L	Hydrochloric Acid (37%)	Inorganic Mineral Acid	
L	Nitric Acid (69%)	Inorganic Mineral Acid	

**CAT III**

**CE 0321**

**USE & CARE:**  
Always inspect your gloves before use. Cuts, tears and punctures are of principal concern. Discolouration or stiffness may indicate non-uniformities in the rubber, or may be a result of chemical attack from previous use. Any damaged gloves should be discarded and replaced prior to use.

Refer to the Chemical Resistance Guide and Physical Performance Chart (above) and select a glove with the highest rating for the chemicals and physical conditions. Always refer to the chemical label and Material Safety Data Sheet (MSDS) before use, as this may recommend a specific glove type.

The information stated in this guide is advisory only. The purchaser must determine the suitability of the glove for use with a specific chemical prior to use.

**STORAGE:** Keep in a cool, dry place (min 18°C) away from direct sunlight and heat.

**DISPOSAL:** Follow EEC and UK Directives for correct disposal.

**Feature Symbols:**



Product packed in retail bags



Product does not contain latex

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.