49 6220

Mechanics glove with Rhinoguard™

Code	49-6220
Description	Mechanics glove with Rhinoguard™
Gauge	N/A
Colour	Black / Yellow
Cuff Style	Neoprene
Length	230-270mm
Sizes	8/M - 11/2XL
Packaging	Packed per pair 36 pairs/carton


TILSATEC®

Features & Benefits

- EN388:2016+A1:2018 level E cut resistance
- RhinoYarn[®] cut resistant technology
- EN388: 2016 level 4 puncture resistance
- · ASTM F2878-19 hypodermic needle test: 6.4 Newtons (Level 3)
- · Leather reinforcement for high action areas
- Rubber pull tab for quick donning and doffing
- · Neoprene expandable wrist for safety and comfort




https://tilsatec.com/products/49-6220-rhinoguard-mechanics-glove

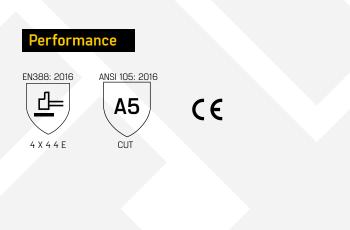

Applications / Industries

- Emergency services:
- Police, Fire Fighters, Search and Rescue
- Security services
- Local authorities, house clearance teams
- Waste management
- Metal forming / handling





Level E cut resistance to EN388: 2016

Tilsatec | +44 (0)1924 375742 | info@tilsatec.com | www.tilsatec.com

For businesses who want expertise they can rely on to keep their people safe, Tilsatec offer high performance hand and arm protection. We manufacture our own proprietary cut resistant yarn - the primary source of mechanical protection, on site in the UK. This means we can deliver maximum performance in every fibre of what we do. Because when our gloves perform at their best, your people can perform at their best.