

Z4000™

CLEAR FRAME - CLEAR ANTI-MIST HC LENS - SPECTACLE CORD

PRODUCT CODE: ASA440-151-300

INCREASED COVERING OF THE EYE AREA FROM THE EXTENDED LENS WITH A SPECTACLE CORD FOR INCREASED CONVENIENCE AND PREVENTION OF MISPLACEMENT

TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

SPECTACLE CORD:

Nylon

LENS:

Polycarbonate

FRAME:

Polycarbonate

PERFORMANCE

Lens and frame offer protection against low energy high-speed particles at 45m/s (101mph)

The optical qualities of the lens comply with the requirements of optical class 1 (highest)

Anti Scratch, Anti Mist Lens

Lens also offers 99.9% UV protection

EN166.1.F & EN170. Tested to resist the impact of a 6mm (1/4") steel ball fired at 100mph (160kph) at the lens

Z4000™ FEATURES & BENEFITS

An exceptionally lightweight sports style safety spectacle, with a wraparound Polycarbonate lens with UV protection and an integrated nose-bridge

Low profile temples make it suitable for use with hearing protection

The temple tips have a spectacle cord anchor point for further practicality

Spectacle includes a simple to attach/detach spectacle cord for convenience and prevention of misplacement

CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN 166 1.F & EN 170

CE 682745 and UKCA 745067 issued by BSI

Z4000™

CLEAR FRAME - CLEAR ANTI-MIST HC LENS - SPECTACLE CORD

PRODUCT CODE: ASA440-151-300

INCREASED COVERING OF THE EYE AREA FROM THE EXTENDED LENS WITH A SPECTACLE CORD FOR INCREASED CONVENIENCE AND PREVENTION OF MISPLACEMENT


TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 0.5kg (Approx.)

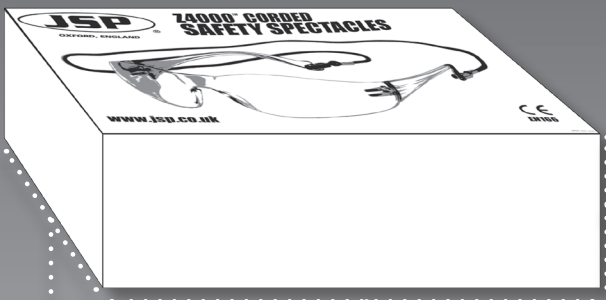

WIDTH:


172mm

LENGTH:

290mm

HEIGHT:

85mm

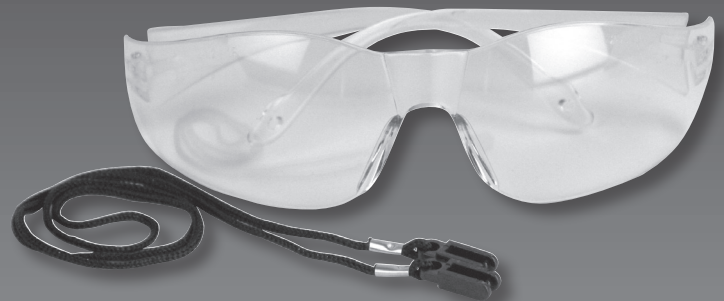

DIMENSIONS OF SPECTACLE & CORD

Lens Thickness: 3mm

Lens Size (Vertical): 46mm

Lens Size (Diagonal): 85mm

Bridge: 13mm

Overall Length (Lens to tip): 151mm

Overall Width: 144mm

Closest point between temple tips: 79mm

Weight: 24g (Approx.)


Spectacle cord Length: 64mm

Spectacle cord weight: 0.1g

DIMENSIONS OF OUTER PACKAGING

Quantity: 200 (20 boxes of 10)

Weight: 10kg (Approx.)

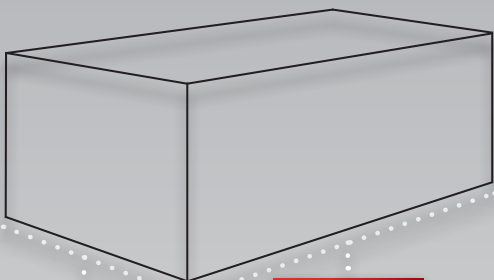

WIDTH:

315mm

LENGTH:

545mm

HEIGHT:

377mm

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Z4000™ is not suitable for protection against dusts, liquids or molten metals

MARKINGS

Frame: EN166 1.F

Clear Lens: 2C-1.2  1.F