



TONS TP-5

CUT RESISTANT GLOVE WITH POLYURETHANE PALM COATING AND RECYCLED POLYESTER

From the TONS range, with very good mechanical resistance and excellent cut protection.

FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable palm coating resists rips and abrasion
- › Excellent grip in dry handling conditions
- › Flexible close-fitting design for a comfortable wearing experience
- › Breathable and lightweight
- › Knitwrist cuff style
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1 PET bottle of 500ml recycled



SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Engineering
- Logistics
- Metals
- Waste Management

Suitable Applications

- Glass Handling
- Injection Moulding
- Metal Fabrication
- Waste Management

CERTIFICATION



See overleaf for explanation





TONS TP-5

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, glass fibre, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey/Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0600	10 pairs per bag 120 pairs per case
7/S	TNS0601	
8/M	TNS0602	
9/L	TNS0603	
10/XL	TNS0604	
11/XXL	TNS0605	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

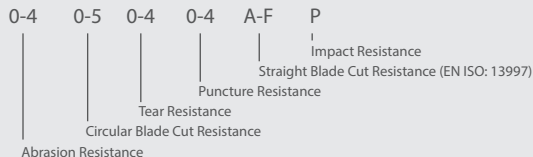

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | SKY-DATA-TONS-TP5-0523_1