

SKYTEC™ | TONS TF-5

CUT RESISTANT GLOVE WITH FOAM NITRILE PALM COATING AND RECYCLED POLYESTER

From the TONS range, with very good mechanical resistance and excellent cut protection.

FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable foam nitrile palm coating grips in dry, damp and light oily conditions
- › Excellent dexterity
- › Medium weight feel
- › Breathable materials
- › Knitwrist cuff style
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1PET bottle of 500ml recycled



CUT LEVEL
D

VENDING MACHINE
COMPATIBLE

RECYCLED 100
claim standard

ECO

SUITABLE FOR

- | | |
|---|--|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Automotive ▪ Construction ▪ Engineering ▪ Logistics ▪ Metal Fabrication and Handling ▪ Waste Management | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Handling Oily Components With Sharp Edges ▪ Injection Moulding ▪ Metal Fabrication ▪ Wiring |
|---|--|

CERTIFICATION

CAT II

EN 388:2016

4X43D

ANSI/ISEA 105

See overleaf for explanation



TONS TF-5

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, glass fibre, recycled polyester
	COATING:	Foam nitrile
COLOUR	Grey / Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0500	10 pairs per bag
7/S	TNS0501	
8/M	TNS0502	120 pairs per case
9/L	TNS0503	
10/XL	TNS0504	
11/XXL	TNS0505	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

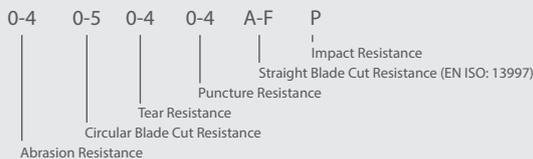

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-TONS-TF5-1123,1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.