



DOUBLE INSULATED GENERAL HANDLING GLOVE

Featuring a soft, thermal lining and a durable HPT foam coating that extends across the knuckles, Argon provides excellent warmth, grip and protection even in damp environments.

FEATURES

- › Durable glove that remains flexible to temperatures as low as -50°C
- › Encapsulated air molecules provide an inherent cushioning effect
- › Hydropellent Technology repels liquids
- › Secure grip in wet and dry environments
- › Enhanced protection to palm, fingers and knuckles
- › Excellent dexterity, flexibility and durability
- › Silicone free



SUITABLE FOR


Typical Industries

- Cold Storage
- Construction
- Logistics
- Manufacturing
- Oil and Gas
- Utilities

Suitable Applications

- Goods Handling
- Groundworks
- Labouring
- Outdoor Maintenance
- Public Works
- Yard Work

CERTIFICATION

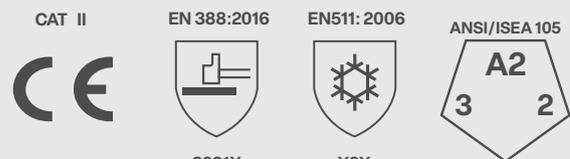

See overleaf for explanation



PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge nylon
	COATING:	PVC HPT
COLOUR	Black/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY081	5 pairs per bag
8/M	SKY082	
9/L	SKY083	
10/XL	SKY084	
		120 pairs per case


RECOMMENDATIONS FOR USE

- USE: Cold resistant glove. Not suitable for thermal (heat), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

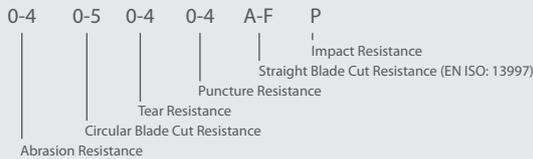


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



COLD HAZARDS EN 511

PERFORMANCE LEVELS

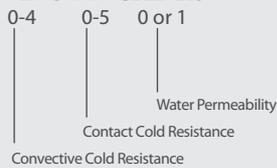

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)